


MORE FROM WOOD.



EPL035 BARDOLINO OAK




EPL092 SAND BEIGE ZERMATT OAK

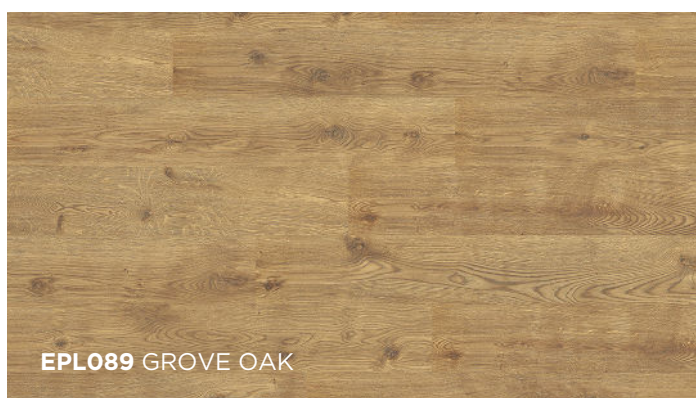

EPL089 GROVE OAK



EPL139 MUROM OAK

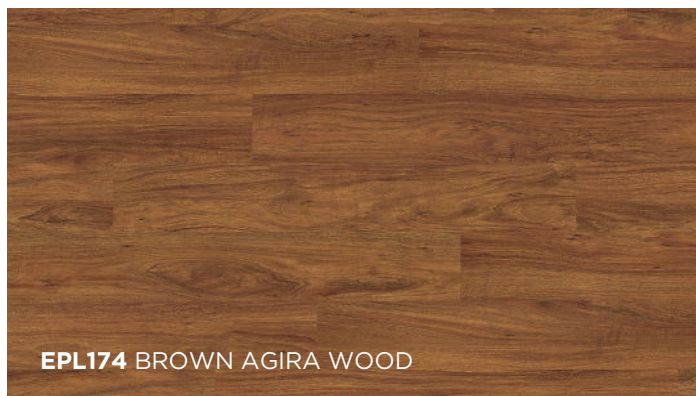

EPL174 BROWN AGIRA WOOD



EPL138 MUROM OAK GREY



EPL136 LASKEN OAK

PRO 8 31



Technical data sheet

EGGER Laminate Flooring

Quality management ISO 9001:2015
Code TDEL001
Revision 02

Coreboard	HDF swell stopp plus (emission standard E1, CARB2/TSCA VI)		
Profile	CLIC it!		
Declared performance according to EN 14041			
Formaldehyde according to EN 717-1	E1	Slip resistance according to EN 13893	DS, ≥ 0,3
Thermal conductivity according to EN 12524	0,12 W/(m*K)	Antistatic properties according EN 1815	yes, < 2 kV
Fire classification according to EN 13501-1	Cfl-s1		

Classification and general requirements according to EN 13329

Class of use	31	32	33
Guarantee domestic area	15 years	20 years	25 years
Guarantee comercial area	5 years	5 years	5 years
Abrasion resistance, test methode A according EN 13329, Annex E	AC3 / ≥ 2.000 cycles	AC4 / ≥ 4.000 cycles	AC5 / ≥ 6.000 cycles
Impact resistance, test methods "small/ big ball" according EN 13329, Annex H	≥ 8 N ≥ 500 mm	≥ 12 N ≥ 750 mm	≥ 15 N ≥ 1.000 mm
Resistance to staining EN 438 - 2	group 1 + 2: level 5 group 3: level 4	group 1 + 2: level 5 group 3: level 4	group 1 + 2: level 5 group 3: level 4
Thickness swelling according ISO 24336	≤ 18 %	≤ 18 %	≤ 15 %
Static indentation by constant pressure according ISO 24343-1	≤ 0,05 mm	≤ 0,05 mm	≤ 0,05 mm
Effect of furniture leg according EN 424 (foot Type 0)	No change in appearance or damage	No change in appearance or damage	No change in appearance or damage
Effect of a castor chair according EN 425	25.000 cycles	25.000 cycles	25.000 cycles
Profile strength lengthways / crossways according to ISO 24334	no requirement	≥ 1,0 kN/m / ≥ 2,0 kN/m	≥ 1,0 kN/m / ≥ 2,0 kN/m
Dimensional tolerances of the board according to ISO 24337	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm	length ± 0,5 mm width ± 0,1 mm thickness ± 0,5 mm

Format & Packaging

Dimension mm (length x width)	Classic 1.292 x 193				Medium 1.292 x 135	Large 1.292 x 246	Kingsize 1.292 x 327	Long 2.050 x 246	
	7 mm	8 mm	10 mm	12 mm	10 mm	8 mm	8 mm	10 mm	
Complete thickness	7 mm	8 mm	10 mm	12 mm	10 mm	8 mm	8 mm	10 mm	
Class of use 31	✓	✓							
Class of use 32	✓	✓	✓	✓	✓	✓	✓	✓	
Class of use 33		✓	✓	✓					
Bevel, without	✓	✓							
Bevel, Lengthwise	✓	✓					✓		
Bevel, circumferential	✓	✓	✓	✓	✓	✓	✓	✓	
Bevel, circumferential + 1							✓		
Paket information	Piece	10	8	7	6	8	8	6	5
	m ²	2,49	1,99	1,75	1,50	1,40	2,54	2,53	2,52
	kg	15,54	14,54	15,99	12,28	10,15	19,04	18,31	23,20
Pallet information	Paket per pallet	52	60	52	52	75	45	40	33
	m ²	129,67	119,69	90,77	77,80	104,65	114,42	101,40	83,21
	kg	848	872	857	638	799	850	763	790

